

CIRCLE GLOW 40R



TECHNICAL PARAMETER

Product code: ILLUXI 40R

Max. Power: 35W

Light source: 4 in 1 RGBL

Luminous Flux: 1450lm

Peak Intensity: 6800cd(15°)

CRI: Ra: 85

CTO: 1800K-10000K

Built-in colors: 24 preset colors

Con Personality: DMX512, RDM

Operating voltage: AC220V-50/60Hz


Working Temperature: -20°C~45°C

Protection Level: IP67

Dimensions (L*W*H): 179*127*177mm


weight: 1.7kg

ANGLE



LIGHT DISTRIBUTION DIAGRAM

(★THE ABOVE COLOR TEMPERATURES ARE ACHIEVED BY YAJIANG DIGITAL COLOR TECHNOLOGY AND CCS TECHNOLOGY)

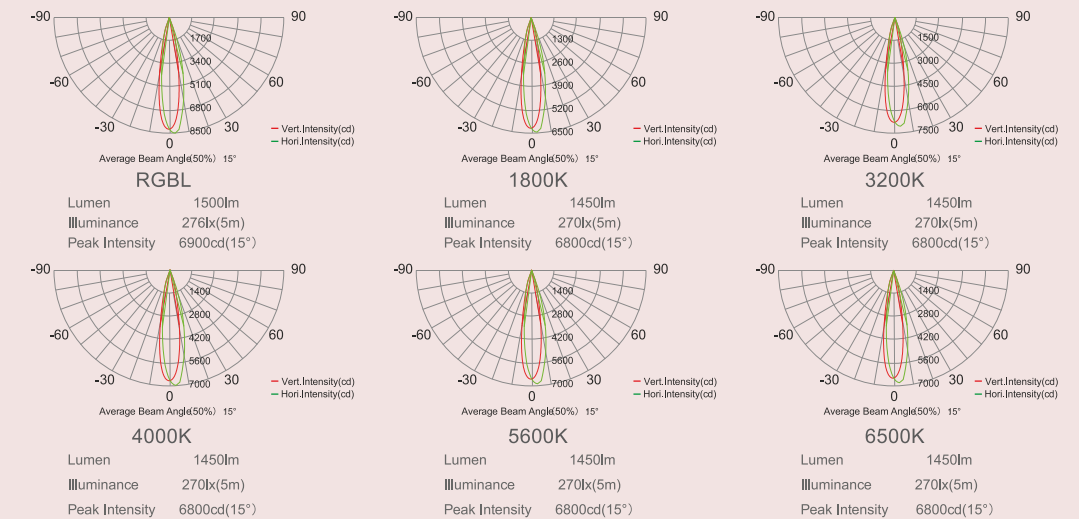


CIRCLE GLOW 40R the selection of lightweight, low-carbon environmental protection design, the weight of the whole fixture is only 1.7kg, green lighting energy consumption ratio of 670lm/kg, the use of high efficiency and 4-in-1 RGBL LED chip, to ensure that the LED in high-in-tensity operation stable as a rock, durable, unique high color mixing design, easy to handle multi-color output color mixing. The IP67 level protection, easy to cope with outdoor environment. Suitable for lawn wetlands, parks and other outdoor environment. CIRCLE GLOW 40R small body large energy, landscape lighting perfect option.

SPECIFICATIONS



ILLUMINANCE AT DISTANCE

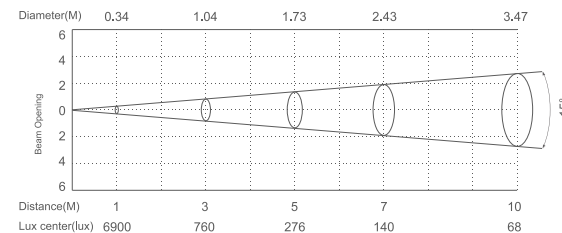

DIMENSIONAL DRAWING

