

CIRCLE GLOW 80R



TECHNICAL PARAMETER

Product code : ILLUXI 80R

Max. Power : 80W

Light source : 4 in 1 RGBL

Luminous Flux : 4563lm

Peak Intensity : 21498cd(15°)

CRI : Ra : 85

CTO : 1800K-10000K

Built-in colors : 24 preset colors

Con Personality : DMX512, RDM

Operating voltage : AC220V-50/60Hz


Working Temperature : -20°C~45°C

Protection Level : IP67

Dimensions (L*W*H) : 202*198*207mm


weight : 4.5kg

ANGLE



LIGHT DISTRIBUTION DIAGRAM

(★THE ABOVE COLOR TEMPERATURES ARE ACHIEVED BY YAJIANG DIGITAL COLOR TECHNOLOGY AND CCS TECHNOLOGY)

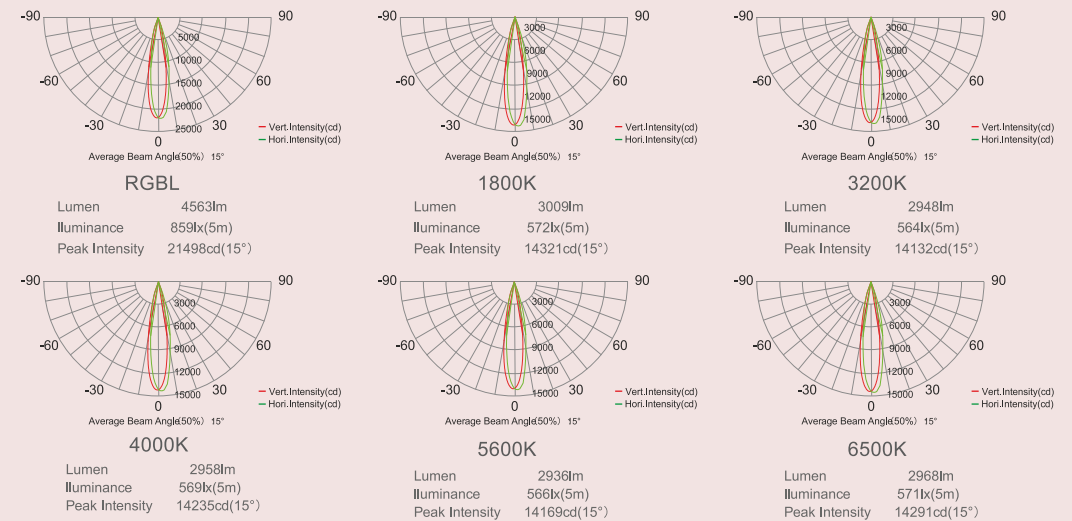


CIRCLE GLOW 80R with high light efficiency and high CRI, the selection of lightweight, low-carbon environmental protection design, the weight of the whole fixture is only 4.5kg, green lighting energy consumption ratio of 889lm/kg, the use of high efficiency and 4-in-1 RGBL LED chip, to ensure that the LED in high-intensity operation stable as a rock, durable. The light efficiency up to 57 lm/w, to create a new concept of energy saving fixture. The CG are suitable for garden landscape, city square and other outdoor environment. Let every CIRCLE GLOW 80R fixtures become a work of art, light up the city night.


SPECIFICATIONS



ILLUMINANCE AT DISTANCE

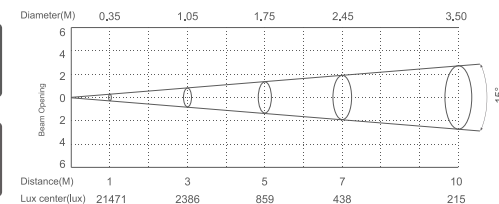

DIMENSIONAL DRAWING

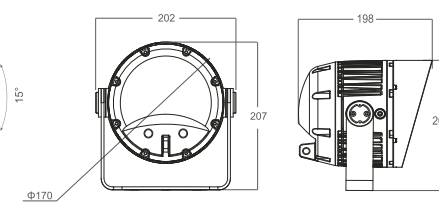

OPTIONAL ACCESSORIES

