

# ECLIPSEX 450 HYBRID IP

## Product Parameters

Optical system		Appearance	Electrical Specs	
Light source	450W module	416x356x670mm	Voltage	AC100-240V,50/60Hz
Angle	2.7°-33°	Weight 34.1KG	Max. Power	560W
		Casing Flame-retardant plastic V0	Power Connection	power in
		Die-cast aluminum	Signal Socket	3pin or 5pin in and out
		Color Black		RJ45 in and out
Control System				
Pan/Tilt rotation	540°/270°8-16bit		Display	On board Control, Custom Mode,0-25Hz Strobe
Dimmer	0-100% 16Bit		Con Personality	STANDARD 26CH /BASIC 22CH /EXTEND 30CH
Cooling	Forced Convection		Special	Pan/Tilt movement blackout, User-selectable pan/tilt ranges, gravitation sensor for auto screen positioning
Control	DMX RDM ARTNET SACN WEB server W-DMX optional			
Effect synthetic system				
Rotating Gobo	7 Gobos+ White, Gobo-flow effect, Gobo shake, Bi-directional rotation		Prism	One piece of 5 F prism with bi-directional rotation, Speed adjustable
Static Gobo	7 Gobos+ White Gobo-flow effect Gobo shake		Focus	Motorized linear focus
Animation Wheel	Bi-directional rotation,Speed adjustable		Frost	1 Frost filter
Colors	CMY , One color wheel(7dichroic-filters+White Rainbow-floweffect)			
Certification			Work Environment	
CEMET			Ambient Temp	-20°C-45°C
			IP Rated	IP66



ECLIPSEX 450 HYBRID IP is a powerful IP hybrid moving head, with high-efficient optics, wide zoom angle from 2.7°-33°, provides a strong Beam and Spot effect. It has fast and silent X/Y movement, professional high quality color wheel, extremely clean static and rotation gobo projection, Perfect product for outdoor concerts/events, commercial complex, theme park, amusement park and rental touring market.

## FIXED GOBO



## COLORS



## ROTATION GOBO



## CMY




## ANIMATION WHEEL



## Accessories



(Accessories not included unless otherwise stated)



Wireless receiver Kit  
(2440010465)

Flight Case  
[1320400204]

## ILLUMINANCE AT DISTANCE

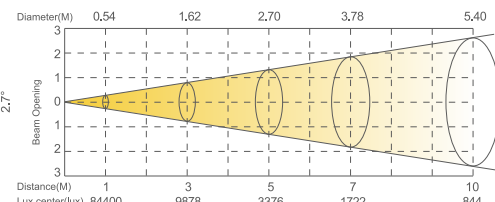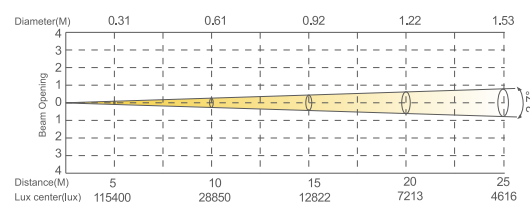

## DIMENSIONS

