

ECLIPSEX FRAMMER 650 IP

NEW



**WATER
PROOF**

ECLIPSEX FRAMMER 650 IP is a 650W light source LED Moving head, with beam, Framing, Spot, dyeing and other functions. On the basis of the original N7, the newly upgraded optical Angle is 6°-50° minimum Angle 5 meters illumination up to 11,3000lux. The Y-axis speed is increased to 1.5 seconds per Round, the NFC function is added, the menu is quickly set, the linear CMYK color mixing system provides rich color saturation, the adjustable linear CTO color temperature, and the professional cutting system can cut out any polygon. Dynamic effects tray can be dyed with water and fire effects. Designed to provide the best choice for venues such as theater, TV stations, concerts and rental shows.

PRODUCT PARAMETERS

Optical system

Light source 650W
Angle 6°-50°
illuminance 5m@11,3000lux

Appearance

Size 416x358x728mm
Weight 35kg
Casing Die-cast magnesium alloy
Color black

Electrical Specs

Voltage AC100-240V
Max Power 800W
Power Connection Power in/out
Signal socket Three or five core input/output RJ45 input/output

Control System

Dimmer Opera dimming effect (0-100% 24Bit dimming)
Cooling Air cooling
Control DMX/RDM/ARTNET/SACN/W-DMX(selectable)/NFC/WIFI/Bluetooth

Display Display board control static, 0-25Hz stroboscopic
Con Personality STANDARD9(41CHS)、BASIC(35CHS)、EXTEND(44CHS)

Effect synthetic system

Rotating Gobo 7 rotating Gobo wheel + white, Gobo-flow effect, Gobo shake effect, Bi-directional rotation
Static Gobo 8+1
Colors 1 color wheel(6 colors+white, rainbow-flow effect)
Animation wheel Bi-directional rotatin, water and flame effect, speed Speed adjustable
prism 1 pentaprism, positive and negative rotation, adjustable speed
focusing With linear focus function

CMYK CMY,CTO
Framing system 4 shutter blade, Each blade's angel and direction can be individual controlled, fully blackout; The whole Framing module is ±45°
Iris 5-100% linear aperture adjustment with macro function
Focus With linear zoom function
Frost Light + heavy Frost

Certification

CE

Work Environment

Ambient Temp -20°C-45°C
IP Rated IP66

FIXED GOBO



Colors



Rotation Gobo



CMY+CTO



Framing system




Animation Wheel



ACCESSORIES


(Accessories not included unless otherwise stated)



Flight case
(1320400259)

Wireless receiving module
(2440010465)

ILLUMINANCE AT DISTANCE

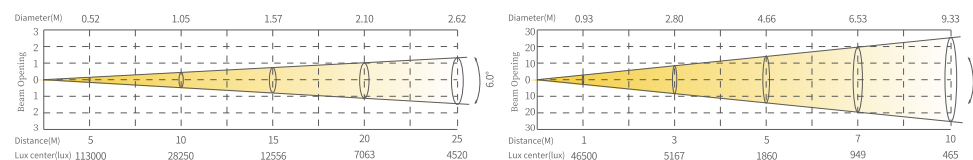

DIMENSIONS

