

LINEA GLOW 30

TECHNICAL PARAMETER

Product code : LINEA GLOW 30

Max. Power : 30W

Light source : 4 in 1 RGBL

Luminous Flux : 2150lm

Peak Intensity : 7121cd(15°)

CRI : Ra : 85

CTO : 1800K-10000K

Built-in colors : 24 preset colors

Con Personality : DMX512, RDM

Operating voltage : AC220V-50/60Hz


Working Temperature : -20°C~45°C

Protection Level : IP67

Dimensions (L*W*H) : 305x66x61mm



weight : 1.2kg

ANGLE



LIGHT DISTRIBUTION DIAGRAM

(★THE ABOVE COLOR TEMPERATURES ARE ACHIEVED BY YAJIANG DIGITAL COLOR TECHNOLOGY AND CCS TECHNOLOGY)

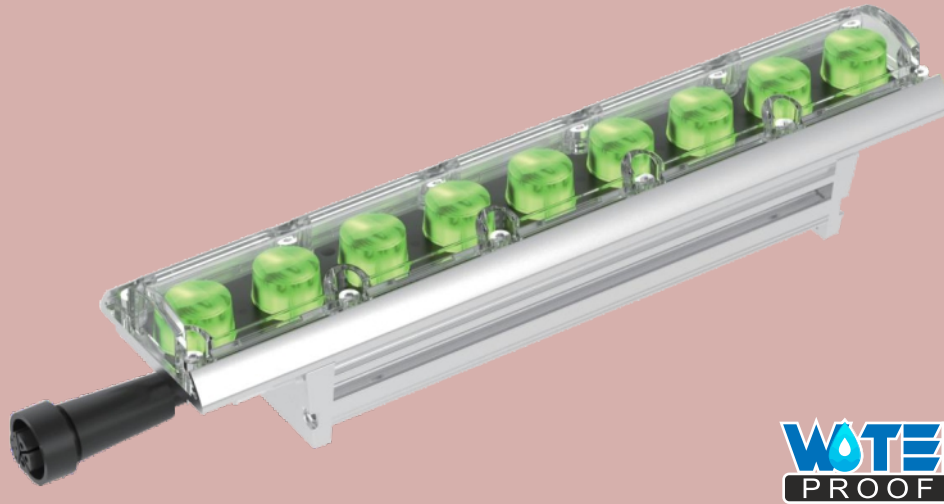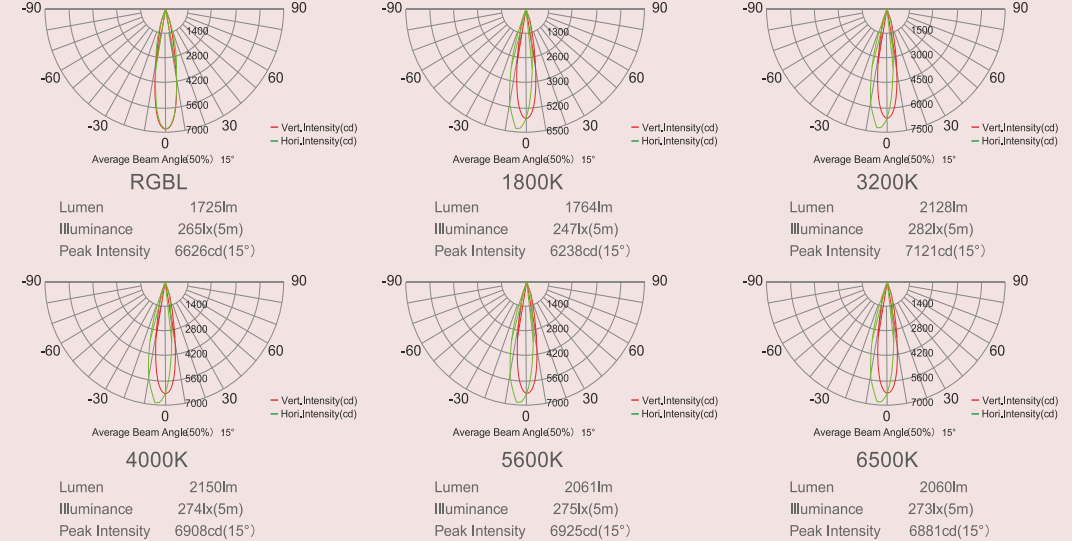


LINEA GLOW 30L the selection of lightweight, low-carbon environmental protection design, the weight of the whole fixture is only 1.2kg, green lighting energy consumption ratio of 1433lm/kg, innovative high-power 4-in-1 RGBL LED chip, integration of unique high-end optical design, easily get an accurate mixed single color or multi-color, and the light efficiency up to 71lm/w, leading the new concept of lighting energy saving. Seamless connection design, RDM, and DMX512 control, can achieve color gradual change, jump, chase and other effects, the LINEA GLOW 30 suitable for large building lighting projects, like commercial building, elevated overpasses, building external walls, landmarks and other facade wash. LINEA GLOW 30 makes every space lighting with charm.


SPECIFICATIONS



ILLUMINANCE AT DISTANCE

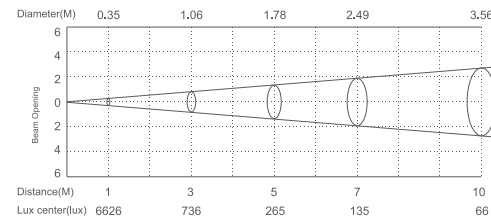

DIMENSIONAL DRAWING

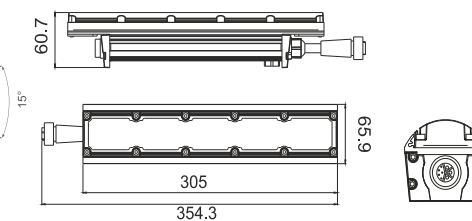

OPTIONAL ACCESSORIES

