

LINEA GLOW 60

TECHNICAL PARAMETER

Product code : LINEA GLOW 60

Max. Power : 60W

Light source : 4 in 1 RGBL

Luminous Flux : 5072lm

Peak Intensity : 14709cd(15°)

CRI : Ra : 85

CTO : 1800K-10000K

Built-in colors : 24 preset colors

Con Personality : DMX512, RDM

Operating voltage : AC220V-50/60Hz


Working Temperature : -20°C~45°C

Protection Level : IP67

Dimensions (L*W*H) : 610x66x61mm



weight : 2.2kg

ANGLE



LIGHT DISTRIBUTION DIAGRAM

(★THE ABOVE COLOR TEMPERATURES ARE ACHIEVED BY YAJIANG DIGITAL COLOR TECHNOLOGY AND CCS TECHNOLOGY)

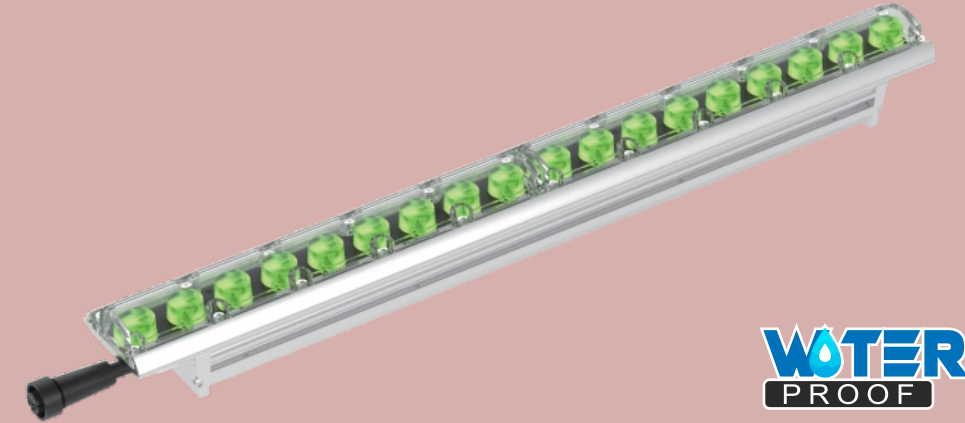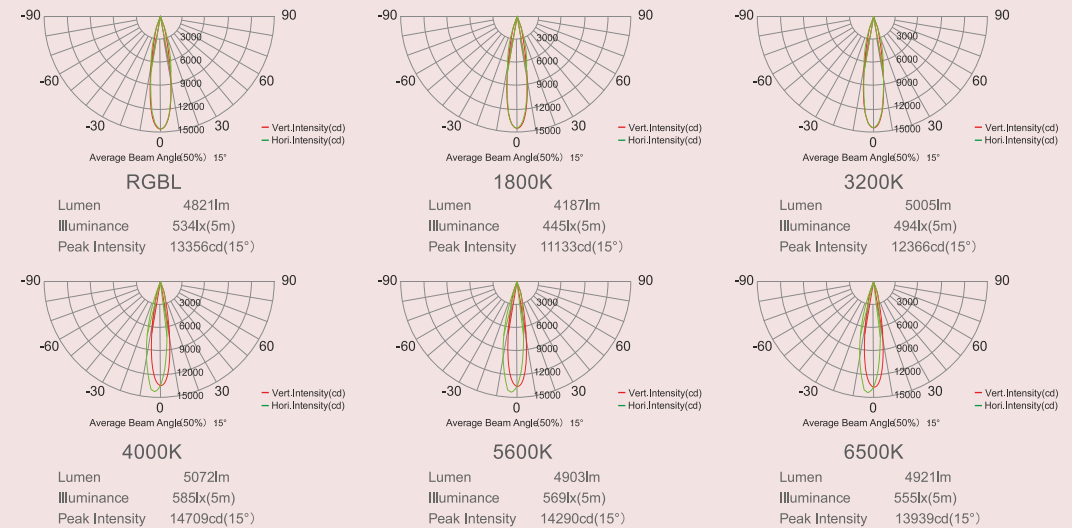


LINEA GLOW 60 the selection of lightweight, low-carbon environmental protection design, the weight of the whole fixture is only 2.2kg, green lighting energy consumption ratio of 1878lm/kg, innovative high-power 4-in-1 RGBL LED chip, integration of unique high-end optical design, easily get an accurate mixed single color or multi-color, and the light efficiency up to 84lm/w, leading the new concept of lighting energy saving. Seamless connection design, RDM, DMX512 and segment control, can achieve color gradual change, jump, chase and other effects, the LINEA GLOW 60 suitable for large building lighting projects, like commercial building, elevated overpasses, building external walls, landmarks and other facade wash. LINEA GLOW 60 makes every space lighting with charm.


SPECIFICATIONS



ILLUMINANCE AT DISTANCE

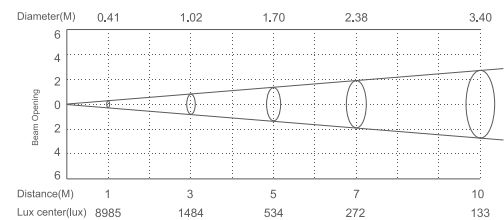

DIMENSIONAL DRAWING

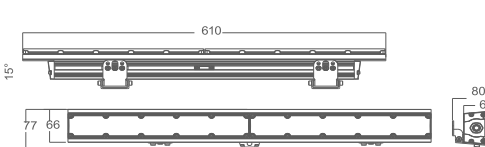

OPTIONAL ACCESSORIES

