

OPTI GLOW X 600 GOBO PROJECTOR IP

arctik



TECHNICAL PARAMETER

MAX. POWER

750W

LIGHT SOURCE

600W (cool white LED module)

ANGLE

5°-52°(electronic zoom)

DISPLAY

On board Control, 0-25Hz Strobe

CON PERSONALITY

STANDARD(26CHS), BASIC(20CHS)

ROTATING GOBO

2 rotating gobo wheels (7+open interchange glass gobos),
Gobo-flow effect, Gobo shake, Bi-directional rotation

COLORS

One color wheel (6 dichroic-filters+open, Rainbow flow effect)

CCT

Linear CTO

PRISM

One 4 prism with bi-directional rotation, Speed adjustable

CMY

CMY, independently variable 0 - 100%

FOCUS

Motorized linear focus

ANIMATION WHEEL

Bi-directional rotation, Speed adjustable

FROST

1 motorized frost filter

SHUTTER SYSTEM

4 manual shutter blades

DIMENSIONS (L*W*H)

683x343x522mm

COLORS



CMY+CTO



ROTATION GOBO 1



ROTATION GOBO 2



ANIMATION WHEEL




MANUAL FRAMING SYSTEM





OPTI GLOW X GOBO PROJECTOR 600 IP outdoor gobo projector has an IP66 proof and is equipped with an intelligent temperature control system to ensure stable operation in all-weather environments and effectively reduce maintenance costs. The 600-watt LED light source and the 5°-52° electronic zoom function make the large-area, long-distance gobo projection effortless. The framing system makes long-distance light projection arbitrary. With a built-in automatic focusing system, the pattern is clearly visible at any distance. The CMY color-mixing system and the independent linear CTO color temperature adjustment function ensure the uniformity and smooth transition of colors. In addition, it also comes with 14 rotating gobos, prisms, and an animation wheel, brings you a flexible and rich visual effect. Whether such as theme parks, landscape lighting, or center park projects, etc., it can become a powerful assistant for you to create unique light and art effect.

SPECIFICATIONS

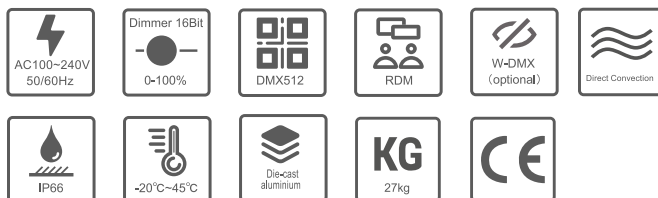

PHOTOMETRIC DATA

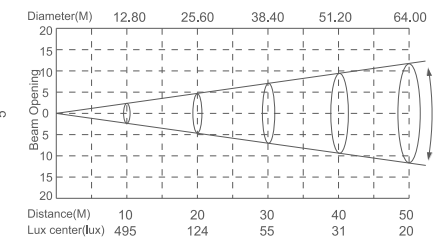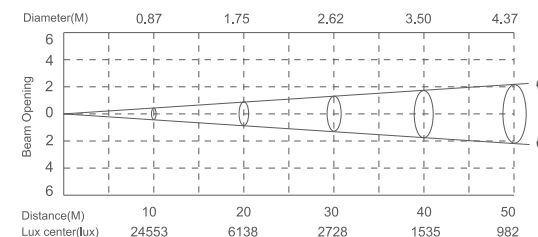

OPTIONAL ACCESSORIES

