


OPTI GLOW X LED 350 GOBO PROJECTOR IP arctik



TECHNICAL PARAMETER

MAX. POWER

350W

LIGHT SOURCE

350W (cool white LED module)

ANGLE

8°-40°(electronic zoom)

DISPLAY

On board Control, 0-25Hz Strobe

CON PERSONALITY

STANDARD(20CHS), BASIC(17CHS)

ROTATING GOBO

7 Gobos+White, Gobo-flow effect, Gobo shake, Bi-directional rotation

COLORS

One color wheel (7 color-filter+White, Rainbow flow effect)

PRISM

One 4F prism with bi-directional rotation, Speed adjustable

CMY

CMY system, Built-in Macro

FOCUS

Motorized linear focus

ANIMATION WHEEL

Bi-directional rotation, Speed adjustable

FROST

1 Frost filter

DIMENSIONS (L*W*H)

605x343x250mm

COLORS



ROTATION GOBO




ANIMATION WHEEL





OPTI GLOW LED GOBO PROJECTOR 350 IP is extremely competitive outdoor IP66 gobo project. The die-cast aluminum housing and natural cooling heat dissipation technology ensure the reliable stability. With electronic zoom of 8-40°, it can be used for large-area and long-distance projection, the built-in automatic focusing system can quickly adjust the light spot clearly. Equipped with the CMY color-mixing system and 7 color filters, 7 rotating gobos, the dynamic effect wheel, 4F prism can realize rich and colorful animation effects. The OLED display with touch buttons can be the control system easily at site. It is applied in theme parks, amusement places, landmark buildings, building complexes, outdoor performances and other places.

SPECIFICATIONS

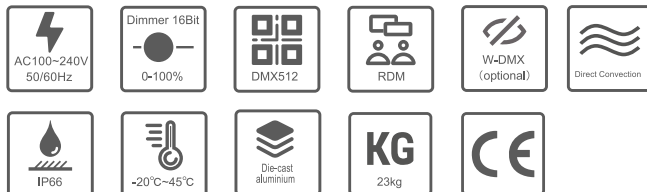

PHOTOMETRIC DATA

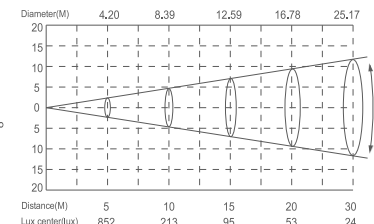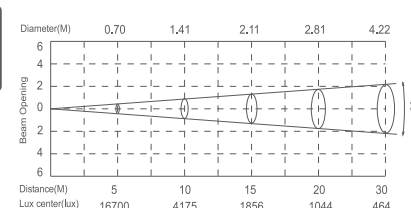

OPTIONAL ACCESSORIES



Glare shield (white)
(2440010333)
Glare shield (grey)
(2440010336)
Glare shield (black)
(2440010692)